

LED Flood / Tunnel / Wallpack Ceiling LIGHTs

OB-FL-PL - 50W | 100W | 150W | 200W | 250W

Application:

Warehouse • Tunnel • High and Low Bay • Billboard • Highway Toll Station • Plant • Pavilion Venue • Public Transportation Station


Model	Input Wattage	Input Voltage Range V	Size	Delivered Lumens (lms)	IP Rating	Color Rendering Index CRI	Color Temperature CCT	Beam Spread	Life Rating
OB-FL-PL - 50W	50W	100-240V AC 50-60Hz	Height 83mm Width 296mm Thickness 116mm	5,000-6,000 Lms+ (Ta=25° C)	IP65	80	3000, 4100 5000, 5700 or 6500K	Batwing: 80 x 130° Flood beam: 120° 60°/90° / Asymmetric 60°x150°	50,000hrs
OB-FL-PL - 100W	100W	100-240V AC 50-60Hz	Height 83mm Width 296mm Thickness 201mm	10,000-12,000 Lms+ (Ta=25° C)	IP65	80	3000, 4100 5000, 5700 or 6500K	Batwing: 80 x 130° Flood beam: 120° 60°/90° / Asymmetric 60°x150°	50,000hrs
OB-FL-PL - 150W	150W	100-240V AC 50-60Hz	Height 83mm Width 296mm Thickness 286mm	15,000-18,000 Lms+ (Ta=25° C)	IP65	80	3000, 4100 5000, 5700 or 6500K	Batwing: 80 x 130° Flood beam: 120° 60°/90° / Asymmetric 60°x150°	50,000hrs
OB-FL-PL - 200W	200W	100-240V AC 50-60Hz	Height 83mm Width 296mm Thickness 371mm	20,000-24,000 Lms+ (Ta=25° C)	IP65	80	3000, 4100 5000, 5700 or 6500K	Batwing: 80 x 130° Flood beam: 120° 60°/90° / Asymmetric 60°x150°	50,000hrs
OB-FL-PL - 250W	250W	100-240V AC 50-60Hz	Height 83mm Width 296mm Thickness 456mm	25,000-20,000 Lms+ (Ta=25° C)	IP65	80	3000, 4100 5000, 5700 or 6500K	Batwing: 80 x 130° Flood beam: 120° 60°/90° / Asymmetric 60°x150°	50,000hrs



Mounting Options:



Square Pole Mount



Round Pole Mount



Trunnion Mount




Direct Arm Mount



Yoke Mount



Slip Fitter Mount

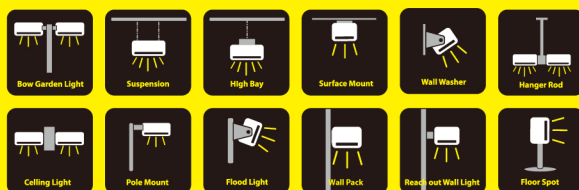

LED Lighting

design innovation

Contact us NOW!

Tel: +86-755-8324 3047
Fax: +86-755-8324 3048

Skype: prismoutbacklight
Email: annie.chen@prismoutbacklight.com



Modular Design

LED Lighting

designinnovation



150W


Sample installation flexibility. See Mounting options at the back

LED Flood / Tunnel / Wallpack Ceiling LIGHTs

OB-FL-PL - **50W** | **100W** | **150W** | **200W** | **250W**




50W




100W



150W



200W

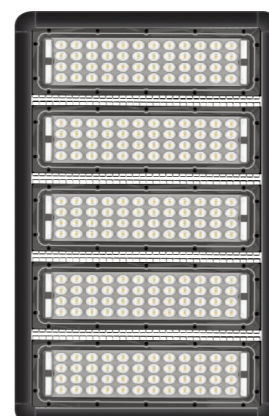

250W



Modular Design



Bow Garden Light



Suspension



High Bay



Surface Mount



Wall Washer



Hanger Rod



Ceiling Light



Pole Mount



Flood Light



Wall Pack



Recessed Wall Light



Floor Spot

Power-Driver
Supplied by:



PHILIPS chip
inside:

PHILIPS

Features

High reflect efficiency: This LED series lighting adopt "Light Engine LED Module" with highgrade lenses that equate to a higher reflective efficiency. Combined with an optimal exchange power supply (Driver) and LED board with minimal maintenance needed.

High CRI>80: High light efficiency, high power factor, energy saving, environmentally friendly, sustainable high-performance.

Multiple option for installation mouting: This LED can be installed in different mounts/bracket, flexible to different lighthing situation.

Anti-shock, easy to transport, it's safer and more reliable than traditional fluorescent lamps. The use of aluminium extrusion heat-sink makes the heat-dissipation better than other products.

Fundamentally lightweight using cooling fins.

Outback
A+Prismtech Outback Lights Co.

www.prismoutbacklight.com

Contact us NOW!

Tel: +86-755-8324 3047
Fax: +86-755-8324 3048

Skype: prismoutbacklight
Email: annie.chen@prismoutbacklight.com

